


Liquid Tight Connector-Straight


Standard Material:

- Zinc Die Cast

Catalogue Number	Size	Dimensions in(inches)				TPI (N1)	TPI (N2)	No.of Lock nuts Used
		A	B	C	D			
		±0.005	±0.005	±0.005	±0.005			
SLT-038I	3/8"	1.201	0.481	1.256	0.488	14	18	1
SLT-050I	1/2"	1.209	0.484	1.283	0.565	14	18	1
SLT-075I	3/4"	1.244	0.488	1.527	0.776	14	18	1
SLT-100I	1"	1.457	0.591	1.772	0.984	11.5	18	1
SLT-125I	1-1/4"	1.725	0.669	2.213	1.260	11.5	16	1
SLT-150I	1-1/2"	1.756	0.669	2.480	1.528	11.5	16	1
SLT-200I	2"	1.732	0.630	2.953	1.941	11.5	16	1
SLT-250I	2-1/2"	2.559	0.945	3.543	2.402	8	14	1
SLT-300I	3"	2.795	0.984	4.252	2.961	8	14	1
SLT-400I	4"	2.992	1.102	5.236	3.799	8	14	1

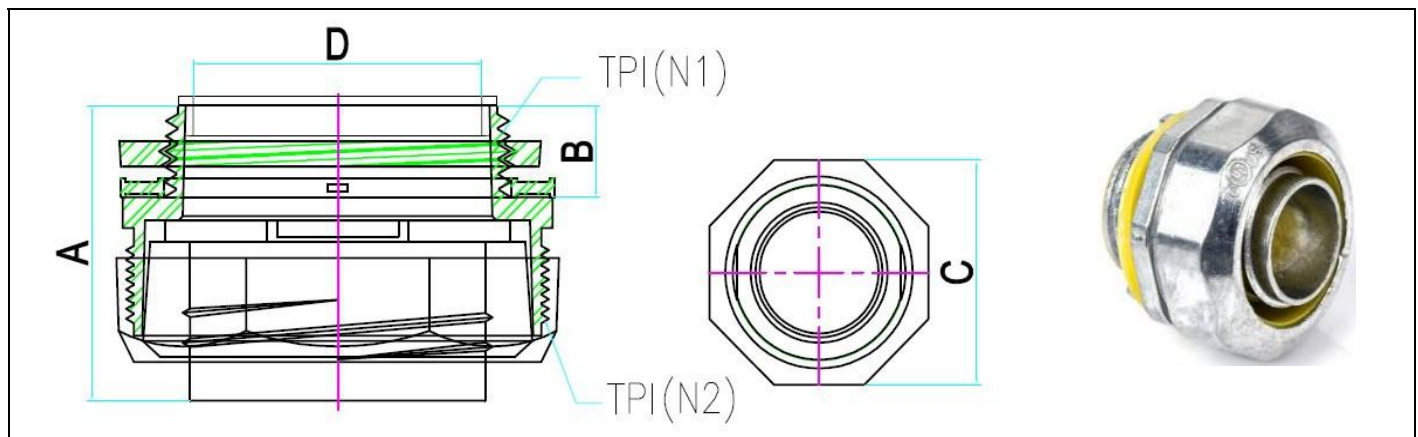

★ Consult Manufacturer for Proper Installation

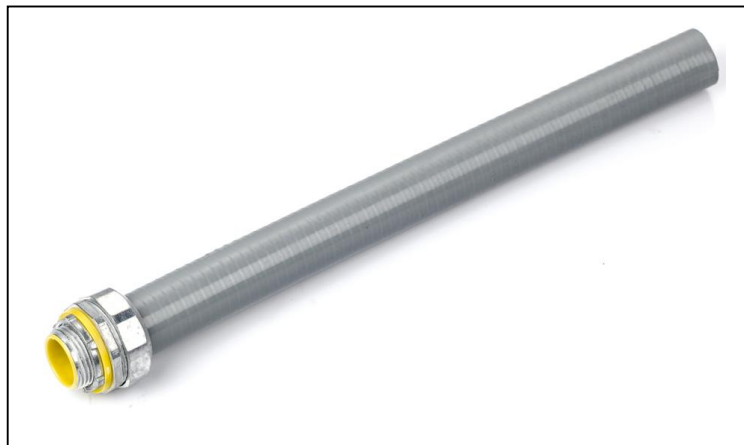

USE: To terminate and seal liquidtight flexible metal conduit to an oiltight, liquidtight or rainlight box or enclosure. Connectors can be used with tapered thread female entry of unthreaded knockouts using the sealing washer and locknut provided.